

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/102250 A1


- (51) International Patent Classification⁷: C22B 1/00, 15/00, 23/00, 60/02
- (21) International Application Number: PCT/AU03/00681
- (22) International Filing Date: 30 May 2003 (30.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PS 2734 31 May 2002 (31.05.2002) AU
- (71) Applicant (for all designated States except US): TECHNOLOGICAL RESOURCES PTY LTD [AU/AU]; 55 Collins Street, Melbourne, Victoria 3000 (AU).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BATTERHAM, Robin, John [AU/AU]; 153 Park Drive, Parkville, Victoria 3052 (AU). ESDAILE, Lucy [AU/AU]; 795 Drummond Street, Carlton, Victoria 3053 (AU). SHAW, Raymond, Walter [AU/AU]; 118 Kirribilli Road, New Gisborne, Victoria 3438 (AU). CROSS, Christopher, Robin [GB/GB]; 89 Oak Wood Avenue, Cyncoed, Cardiff, South Wales CF23 9EZ (GB).
- (74) Agent: GRIFFITH HACK; 509 St Kilda Road, Melbourne, Victoria 3004 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,

[Continued on next page]

(54) Title: MICROWAVE TREATMENT OF ORES



WO 03/102250 A1

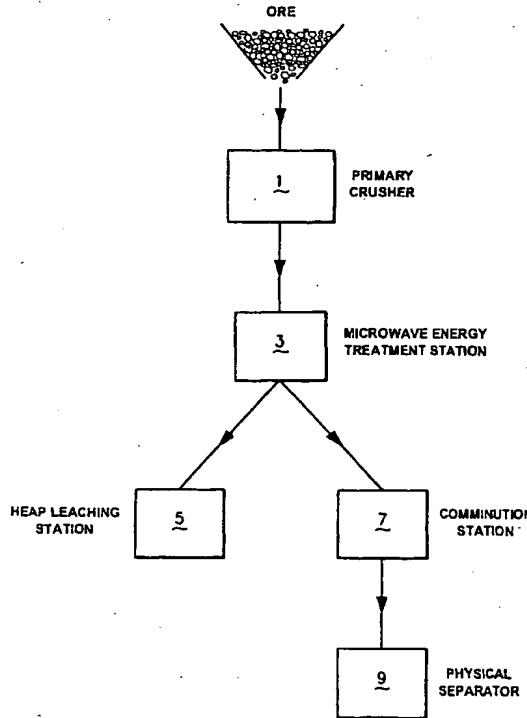

(57) Abstract: A method of treating ore particles to facilitate subsequent processing of the ore particles to recover valuable components from the ore is disclosed. The method includes exposing the ore particles to microwave energy and causing structural alteration of the ore particles. In one embodiment structural alteration is achieved without significantly altering the mineralogy, ie composition, of the ore. In another embodiment structural alteration is achieved with minimal change to the sizes of the ore particles. In another embodiment the method includes exposing the ore particles to short duration, high energy pulses of microwave energy.



SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

10/516431

WO 03/102250

CT/AU03/00681

DT09

d PCT/PTO 30 NOV 2004

1/10/05
- 1 -

MICROWAVE TREATMENT OF ORES

The present invention relates to treating ores with microwave energy to facilitate subsequent processing 5 of the ores.

The present invention relates particularly, although by no means exclusively, to using microwave energy to treat ores to facilitate subsequent processing 10 of the ores to recover valuable components, such as metals from the ores.

There have been a number of proposals to use microwave energy in a range of mining applications, such 15 as comminution of ores, and there is on-going research and development work into these mining applications. However, these proposals have not been successfully used because of difficulties with (a) the high total power needed, (b) constructing a suitable arrangement to expose ores to 20 microwaves, and (c) controlling the level of microwave exposure to avoid unwanted changes in the minerals and undesirable changes in the ore particles themselves.

An object of the present invention is to provide 25 a microwave energy-based method of treating ores to facilitate subsequent processing of the ores to recover valuable components such as metals from the ores.

In general terms, according to the present 30 invention there is provided a method of treating ore particles to facilitate subsequent processing of the ore particles, for example to recover a valuable component such as a metal from the ore particles, the method including exposing the ore particles to microwave energy 35 and causing structural alteration of the ore particles.

Structural alteration of the ore particles is the

- 2 -

result of differences in thermal expansion of minerals within ore particles, as a consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to
5 micro-cracking or other physical changes within the ore particles.

In a specific example, structural alteration of the ore particles is the result of heating and therefore
10 thermal expansion of only some of the minerals within ore particles in response to microwave energy leading to micro-cracking or other physical changes within the ore particles.

15 Preferably the method includes exposing the ore particles to microwave energy and causing structural alteration of the ore particles without significantly altering the mineralogy, ie composition, of the ore.

20 Particularly in cases where the ore is to be leached in the subsequent processing step, preferably the method includes exposing the ore particles to microwave energy and causing structural alteration of the ore particles with minimal change to the sizes of the ore
25 particles.

In this regard, the present invention is based in part on the realisation that microwave energy, particularly high energy microwave energy, can be used
30 selectively to produce micro-cracks in ore particles that improve exposure of the ore to subsequent processing, such as by leaching, without substantially reducing the size of the particles. The latter point can be important in situations where coarse as opposed to fine particles are
35 preferred in the subsequent processing and it is therefore undesirable for microwave energy treatment to cause break down of particles into fines. This is also attractive

- 3 -

where leaching is used to remove a desired component from an ore and there are unwanted reactive components within the ore which consume excessive amounts of reagents if they are ground too finely. This is commonly the case in 5 uranium ores where the recovery obtained is often limited by needing to balance the fineness of grinding of the material to enable the valuable minerals to leach versus the higher consumption of reagents at finer particle sizes.

10

The present invention is also based in part on the realisation that microwave energy, particularly high energy microwave energy, can be used to selectively produce micro-cracks in ore particles that make the 15 particles susceptible to subsequent comminution to reduce the particle size of the particles that have micro-cracks to be within an optimum particle size range for subsequent processing of the ore. This is particularly important in situations where the ore particles that contain valuable 20 components, such as metals, minerals or gemstones, are the most affected by the microwave energy treatment and break down preferentially into smaller size particles than the remainder of the ore particles and thereby allow separation of the valuable smaller particles from the 25 remaining larger particles by simple physical means. This is also particularly important in the reverse situations where the unwanted material is susceptible to break down in response to exposure to microwave energy.

30

In some cases the ore particles which react to microwaves and break down may include unwanted impurities and can be separated to improve the value of the majority of the ore, such as in the case of iron ores where the method can be used to remove contaminants, such as 35 phosphorus and aluminium.

The term "microwave energy", is herein understood

- 4 -

to mean electromagnetic radiation that has frequencies in the range of 0.3-300 GHz.

The subsequent processing of the ore particles
5 may include heap leaching of the particles.

By way of further example, the subsequent processing of the ore particles may include comminution of the particles to reduce the sizes of the particles to be 10 within an optimum particle size range for subsequent processing of the ore. This step is particularly suitable for ores where the product is not a fine powder such as is the case for iron ore and diamonds. It can also be 15 beneficial in reducing the amount of ore which needs to be ground finely for preparation of the final product if the composition of the different fractions can be directly measured and the components separated in a dry state. Online analysis systems such as Laser Induced Fluorescence, X-Ray Diffraction or Neutron Activation 20 Analysis are particularly suitable for use in combination with the microwave energy treatment.

The method may include screening ore particles prior to exposing the ore particles to microwave energy in 25 order to provide a preferred particle size distribution for subsequent microwave energy treatment.

Preferably the method includes screening ore particles prior to exposing the ore particles to microwave 30 energy in order to remove fines from the ore particles.

Preferably the method includes exposing the ore particles to pulses of microwave energy.

35 In this regard, the present invention is also in part based on the realisation that the use of short pulses enables very high electric fields to be applied to the ore

- 5 -

particles in a simple, much more effective, physical arrangement with the total energy supplied to the particles being controlled by the number and duration of the pulses and that this is advantageous outcome.

5 Specifically, this is an advantageous outcome for some ore particles where high energy is needed to achieve sufficient micro-cracking and where, if the microwaves are supplied continuously, the particles have to be moved through the microwave field very quickly to avoid
10 excessive exposure whilst still achieving the desired rapid localised heating and micro-cracking, in which case there can be limits on the energy of the microwaves used or else complex expensive equipment is needed to enable the exposure.

15

Preferably the ore is exposed to the microwaves within a cavity such as that disclosed within the International patent application WO02092162 in the name of the University of Stellenbosch which amplifies the
20 electric field strength to further improve the efficiency of the exposure and maximises the micro-cracking. The disclosure in the International application is incorporated herein by cross-reference.

25

Preferably the microwave energy within the pulses has high energy to give rapid heating of susceptor minerals in the ore.

30

The term "high energy" is understood herein to mean values substantially above those within conventional household microwaves, ie substantially above 1 kW.

35

The use of pulsed microwave energy minimises the power requirements of the method and maximises thermal cycling of the ore particles.

By appropriate selection of operating conditions,

- 6 -

pulsed microwave energy minimises heating of ore particles to temperatures at which there are changes to the mineralogy of the particles.

5 Preferably the pulsed microwave energy includes pulses of short duration.

10 The term "short duration" is understood herein to mean that the time period of each pulse is less than 1 second.

15 Preferably the pulse time period is less than 0.1 second.

20 More preferably the pulse time period is less than 0.001 second.

25 The time period between pulses of microwave energy may be set as required depending on a number of factors. One factor that is relevant in a number of situations is to ensure that there is no undue heating of the mass of ore particles which could cause composition changes to the ore. Preferably the time period between pulses is 10-20 times the pulse time period.

30 The particles may be exposed to one or more pulses of microwaves to achieve the desired level of micro-cracking. This can be achieved in a single installation which releases microwave energy in pulses. This can also be achieved in an installation having multiple exposure points at spaced intervals along a path of movement of the ore, with each of the exposure points releasing its own characteristic microwave energy in pulses or continuously.

35 In a situation in which the subsequent ore processing is heap leaching the ore, the main objective of

- 7 -

exposing ore particles to microwave energy is to structurally alter the ore particles to improve access of a leach solution to ore particles.

5 Improved access to the leach solution may be the result of break down of ore particles into smaller particles.

10 However, in this application, preferably improved access to the leach solution is the result of structural weakening of ore particles that improves porosity of the particles without causing substantial particle break down.

15 The improvement in porosity resulting from microwave energy exposure makes it possible to use larger sized particles of a given ore type in heap leaching than would normally be the case with the ore type.

20 The width of the particle size range presented for microwave energy treatment may influence the extent of particle break down. Specifically, there may be a greater likelihood of particle break down with a wider particle size distribution than with a narrower particle size distribution.

25 Preferably the ore particles include microwave susceptor and non-susceptor components, whereby improved access to the leach solution is the result of structural changes at the interface of microwave susceptor and non-susceptor components of the ore components.

30 The ores of particular interest to the applicant are ores that contain valuable metals and the valuable metals are part of the microwave susceptor components of the ores.

35 Preferably the ores are ores in which the

- 8 -

valuable metal is present as a sulphide.

The applicant is interested particularly in copper-containing ores in which the copper is present as a 5 sulphide, such as chalcopyrite or chalcocite.

The applicant is also interested in nickel-containing ores in which the nickel is present as a sulphide.

10

The applicant is also interested in uranium-containing ores.

The applicant is also interested in ores 15 containing iron minerals where some of the iron minerals have disproportionately higher levels of unwanted impurities.

The applicant is also interested in diamond ores 20 where the ore has a mix of diamond containing minerals and diamond barren minerals such as quartz.

Preferably the ore particles have a major dimension of 15 cm or less prior to exposure to microwave 25 energy.

The wavelength of the microwave energy and the exposure time may be selected depending on relevant factors.

30

Relevant factors may include ore type, particle size, particle size distribution, and requirements for subsequent processing of the ore.

35

The method includes any suitable steps for exposing the ore to microwave energy.

- 9 -

One suitable option includes allowing the ore to free-fall down a transfer chute past a microwave energy generator.

5 The free-fall option is a preferred option to a forced feed option in a mining industry environment because of the materials handling issues that are often associated with the mining industry.

10 Preferably the method includes transporting the ore to an inlet end of the transfer chute on a conveyor and transporting the microwave-treated ore from an outlet end of the transfer chute on a conveyor.

15 According to the present invention there is also provided a method of recovering valuable components, such as a metal, from an ore including the steps of:

20 (a) treating ore particles by exposing ore particles to microwave energy and causing structural alteration of the ore particles, the structural alteration of the ore particles being a result of differences in thermal expansion of minerals within ore particles, as a consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to micro-cracking or other physical changes within the ore particles; and

25 (b) processing the treated ore particles to recover the valuable components.

30 The processing step may be any suitable step, such as leaching the treated ore particles, for example by heap leaching, or comminuting and thereafter physically separating the ore particles into different size fractions.

- 10 -

The present invention is described further by way of example with reference to the accompanying drawing which is a flow sheet of the sequence of steps in a preferred embodiment of a method of recovering a valuable 5 component in the form of copper from copper-containing ores in which copper is present as the minerals chalcopyrite or chalcocite.

With reference to the flow sheet, ore particles 10 are supplied to a primary crusher 1 and are crushed to a particle size of 10-15 cm.

The crushed particles discharged from the primary crusher 1 are supplied via a conveyor (or other suitable 15 transfer means) to a microwave energy treatment station 3 and are allowed to free fall past a microwave energy generator (not shown) that exposes the ore particles to high energy pulses of microwave energy.

20 The microwave energy causes localised heating of the suscepter components of the ore, such as the chalcopyrite and chalcocite minerals, in the ore and the differences in thermal expansion of the constituents of the ore produces regions of high stress/strain within the 25 ore particles and causes micro-cracks to form in the particles, particularly particles containing chalcopyrite and chalcocite minerals.

30 The operating conditions, such as energy level, pulse duration, and exposure length are selected to ensure that the localised heating has minimal if any impact on the composition of the ore particles and does not cause catastrophic break down of the particles. With regard to the latter point, the objective of the microwave energy 35 treatment step in most applications is to form micro-cracks that weaken but do not destroy the particles. Typically, with an input feed of 10-15 cm particles, the

- 11 -

majority of the output will have a particle size from 1-15 cm, with a substantial proportion of the output being larger than 5 cm.

5 Depending on the circumstances, the microwave treated ores are supplied to a heap leaching station 5 and are subjected to leaching to recover copper into solution or to a comminution station 7 and are further crushed and if necessary ground to selectively reduce the particle
10 size of the particles. The micro-cracks in the ore particles improve access for leach solution in the heap leaching step and reduce the energy required to produce an optimum particle size range in the subsequent crushing and grinding steps.

15 In particular, in situations such as the processing of ores containing chalcopyrite and chalcocite minerals, where the valuable metals are concentrated in susceptor materials, the crushing and grinding steps
20 produce a smaller particle size fraction that contains a relatively high concentration of valuable metals and a larger particle size fraction that contains non-valuable material.

25 The ground ore from the comminution station 7 is supplied to a physical separator 9 that separates the larger and smaller particle size fractions to facilitate recovery of copper from the smaller size fraction.

30 Many modifications may be made to the preferred embodiment of the present invention described above without departing from the spirit and scope of the present invention.

- 12 -

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of treating ore particles to facilitate subsequent processing of the ore particles to recover valuable components from the ore, including: exposing the ore particles to microwave energy and causing structural alteration of the ore particles without significantly altering the mineralogy, ie composition, of the ore, the structural alteration of the ore particles being a result of differences in thermal expansion of minerals within ore particles, as a consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to micro-cracking or other physical changes within the ore particles.
- 15 2. The method defined in claim 1 includes exposing the ore particles to microwave energy and causing structural alteration of the ore particles without catastrophic destruction of the ore particles.
- 20 3. The method defined in claim 1 or claim 2 includes screening the ore particles prior to exposing the ore particles to microwave energy in order to provide a preferred particle size distribution for subsequent microwave energy treatment.
- 25 4. The method defined in any one of the preceding claims includes screening the ore particles prior to exposing the ore particles to microwave energy in order to remove fines from the ore particles.
- 30 5. The method defined in any one of the preceding claims includes exposing the ore particles to pulses of microwave energy.
- 35 6. The method defined in claim 5 wherein the microwave energy within the pulses has high energy to give

- 13 -

rapid heating of susceptor minerals in the ore.

7. The method defined in claim 5 or claim 6 wherein
the pulses of microwave energy includes pulses of short
duration.

8. The method defined in claim 7 wherein the time
period of each pulse is less than 1 second.

10 9. The method defined in claim 8 wherein the pulse
time period is less than 0.1 second.

10. The method defined in claim 9 wherein the pulse
time period is less than 0.001 second.

15

11. The method defined in any one of the preceding
claims wherein the ore particles include microwave
susceptor and non-susceptor components and the valuable
components in the ore are metals and the metals are part
20 of the microwave susceptor components of the ores.

12. The method defined in any one of the preceding
claims wherein the ore is an ore in which the valuable
components are metals and the metals are present as a
25 sulphide.

13. The method defined in claim 12 wherein the ore is
a copper-containing ore in which the copper is present as
a sulphide, such as chalcopyrite or chalcocite.

30

14. The method defined in claim 12 wherein the ore is
a nickel-containing ore in which the nickel is present as
a sulphide.

35 15. The method defined in claim 12 wherein the ore is
a uranium-containing ore.

- 14 -

16. The method defined in any one of claims 1 to 11 wherein the ore is an ore in which the valuable components are iron and the ore contains iron minerals where some of the iron minerals have disproportionately higher levels of
5 unwanted impurities.

17. The method defined in any one of claims 1 to 11 wherein the ore is a diamond ore and the ore has a mix of diamond containing minerals and diamond barren minerals
10 such as quartz.

18. The method defined in any one of the preceding claims wherein the ore particles have a major dimension of 15 cm or less prior to exposure to microwave energy.
15

19. The method defined in any one of the preceding claims includes transporting the ore to an inlet end of the transfer chute on a conveyor and transporting the microwave-treated ore from an outlet end of the transfer
20 chute on a conveyor.

20. A method of treating ore particles to facilitate subsequent processing of the ore particles to recover valuable components from the ore, including: exposing the
25 ore particles to microwave energy and causing structural alteration of the particles without catastrophic break down of the particles, the structural alteration of the ore particles being a result of differences in thermal expansion of minerals within ore particles, as a consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to micro-cracking or other physical changes within
30 the ore particles.

35 21. A method of treating ore particles to facilitate subsequent processing of the ore particles to recover valuable components from the ore, including: exposing the

- 15 -

ore particles to pulses of microwave energy and causing structural alteration of the particles, the structural alteration of the ore particles being a result of differences in thermal expansion of minerals within ore particles, as a consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to micro-cracking or other physical changes within the ore particles.

10 22. The method defined in claim 21 wherein the microwave energy within the pulses has high energy to give rapid heating of susceptor minerals in the ore.

15 23. The method defined in claim 21 or claim 22 wherein the pulsed microwave energy includes pulses of short duration and high energy.

20 24. The method defined in claim 23 wherein the time period of each pulse is less than 1 second.

25 25. The method defined in claim 24 wherein the pulse time period is less than 0.1 second.

26. The method defined in claim 25 wherein the pulse 25 time period is less than 0.001 second.

27. A method of recovering valuable metals from an ore including the steps of:

30 (a) treating ore particles by exposing ore particles to microwave energy and causing structural alteration of the particles, the structural alteration of the ore particles being a result of differences in thermal expansion of minerals within ore particles, as a 35 consequence of exposure to microwave energy, resulting in regions of high stress/strain within the ore particles and leading to micro-cracking or other physical changes within

- 16 -


the ore particles; and

(b) processing the treated ore particles to recover
valuable metals.

10/516431

WO 03/102250

PCT/AU03/00681

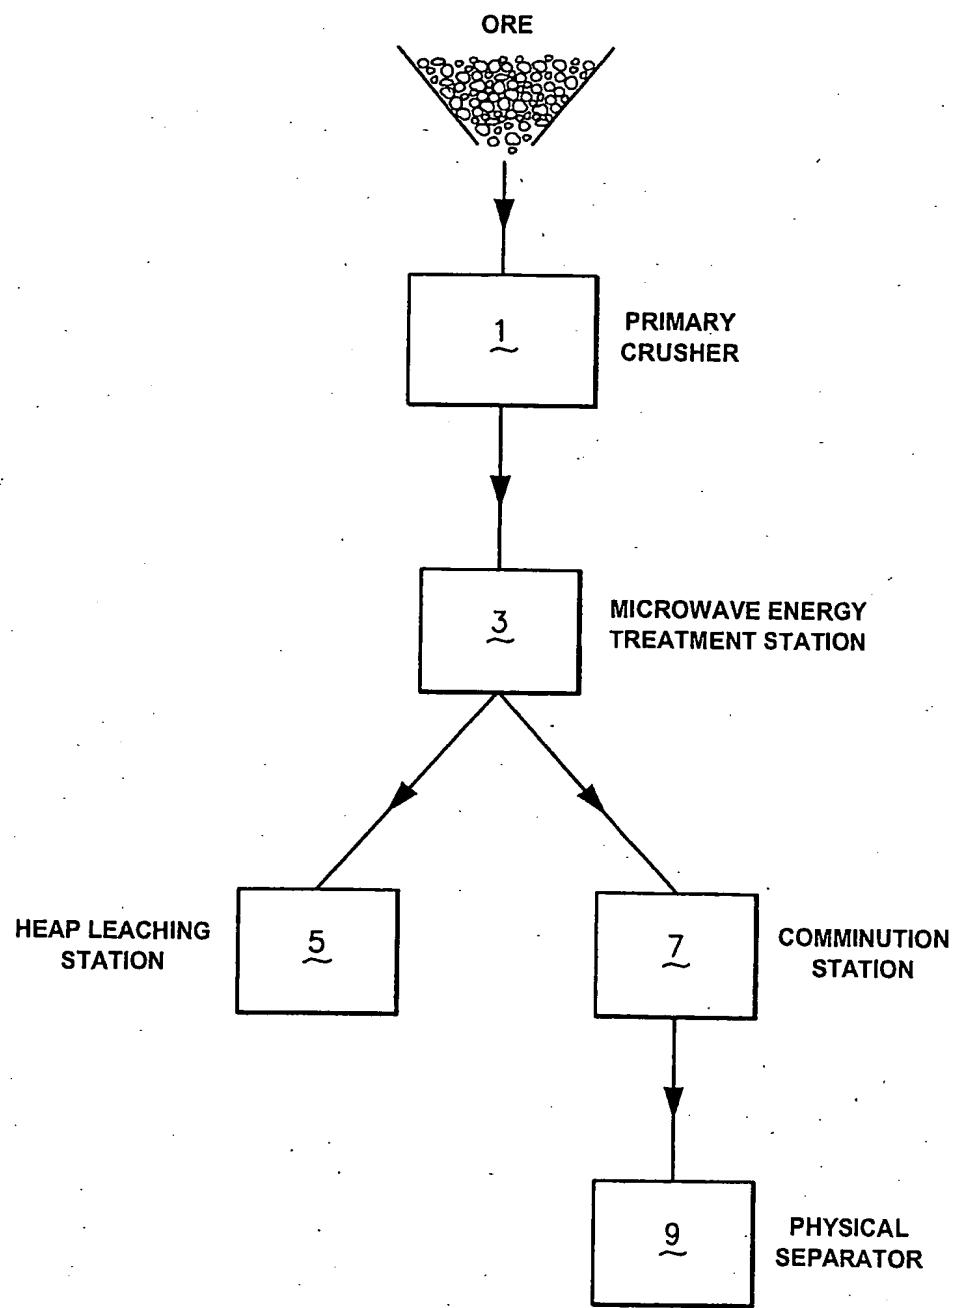

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU03/00681

A. CLASSIFICATION OF SUBJECT MATTER		
Int. CL ⁷ : C22B 1/00, 15/00, 23/00, 60/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Derwent DWPI: IPC C22B and MICROWAV		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CA 2277383 A (GOLDEN WAVE RESOURCES INC., CA) 15 January 2001 See page 1 lines 18-23; page 2 lines 17-26	1-27
X	WO 92/18249 A (THE BROKEN HILL PROPRIETARY COMPANY LIMITED) 29 October 1992 See page 9 lines 18-22; page 10 lines 13-26; page 14 lines 1-6	1-27
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 24 July 2003	Date of mailing of the international search report 1 JUL 2003	
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6283 3929	Authorized officer MATTHEW FRANCIS Telephone No : (02) 6283 2424	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/00681

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report	Patent Family Member		
CA 2277383	NONE		
WO 9218249	AU 15720/92	ZA 9202643	
END OF ANNEX			